



## GLAZE PLUS LUXURY INTERIOR EMULSION

Wallmaax Paints Glaze Plus Luxury Sheen Emulsion is an exquisite emulsion paint that provides a luxurious finish and a silky glowing appearance to your walls.



**LEAD FREE\* GUARANTEE**

\* All Wallmaax Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2016.




### SALIENT FEATURES

- Wallmaax Interior Glaze is designed for Low VOC standards and the absence of any harmful chemical results in very low odor.
- Interior Glaze has enhanced stain resistance that protects your walls for all kind of stains. The toughest household stains like turmeric and ink are reduced to a large extent, while water based stain like tea, coffee etc are completely removed. The hard special emulsion back bone confirms removal of non standard stains like permanent marker etc. The film is even washable with mild acids.
- Anti- Bacterial and Anti- Fungal Shield Royale Luxury Emulsion is designed to prevent fungal growth on walls. The product has been ensured to have long life free from black spots or streaks - maintaining the freshness and sheen of the film throughout.

- With a very specific combination of anti fungal and anti algal additives, the product has been ensured to have long life free from black spots or streaks - maintaining the freshness and sheen of the film throughout.
- The Film has a beautiful sheen/luster to it yielding a classy finish to your house that is long lasting.
- The product has no added hazardous materials like heavy metals – lead, arsenic, Chromium, Cadmium) or toxic materials that are carcinogenic, mutagenic, reprotoxin by nature.

### PRODUCT FEATURES

#### Available Packs

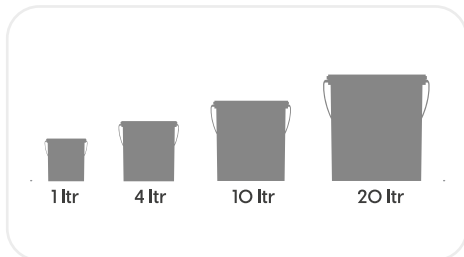


#### Available Colors

**2000+** 

\*Currently available in more than 2000+ shades as per the Wallmaax Paints Colour Symphony.

#### Coverage

On normal masonry surface after brushing




**1 COAT**  
**140 – 150 sq.ft./ltr\*\***

**2 COAT**  
**75 – 85 sq.ft./ltr\*\***

\* Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.


### PRE PAINTING STEPS



It is recommended to allow 28 days as the curing time for new masonry surfaces.



Cleaned Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water.



In case of areas having excessive dampness use appropriate rectification to overcome this substrate defect. Wallmaax Interior Glaze Emulsion should not be applied on surfaces / substrates that are subjected to continuous seepage or dampness.



When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Wallmaax Salt Resistant Elastomeric Primer.

**FILLING FOR CRACKS** For filling cracks upto 3mm use Wallmaax Crack Sealant.

**FILLING FOR HOLES & DENTS** In case of dents and holes use Wallmaax Paints Acrylic Wall Putty or white cement and fine sand in the ratio 1:3

### APPLICATION PARAMETERS

#### APPLICATION

- STEP 1**  
**SANDING**
- Brush / Roller / Spray  
**Innex or Cement Primer Interior**  
**Salt Resistant Elastomeric Primer**
- Prime Seal**
- STEP 3**  
**Putty Knife**  
**Deluxe Acrylic Wall Putty**
- STEP 4**  
**SANDING**
- STEP 5**  
**Brush / Roller / Spray**  
**Innex or Cement Primer Interior**  
**Salt Resistant Elastomeric Primer**
- Prime Seal**
- STEP 6**  
**SANDING**
- STEP 7**  
**First Coat of Glaze Interior Plus**
- STEP 8**  
**First Coat of Glaze Interior Plus**

TINNER	DILUTION %	APPLICATION VISCOSITY - FLOW CUP B4	RECOATING PERIOD
<b>SAND THE SURFACE WITH #180 TO GET A SMOOTH / UNIFORM SUBSTRATE</b>			
Water	Brush/Roller 80 - 100%	Brush/Roller: 30 - 40 Secs Spray 25- 30 Secs	4 - 6 Hrs
Water	Brush/Roller 60 - 70% Spray 80 - 90%		4 - 6 Hrs
Water	Brush/Roller 70 - 90%		4 - 6 Hrs
Water	Putty Knife - As Required	NA	4 - 6 Hrs
<b>SAND THE SURFACE WITH #180 TO GET A SMOOTH / UNIFORM SUBSTRATE</b>			
Water	Brush/Roller 80 - 100%	Brush/Roller 30 - 40 Spray 25 - 30 Secs	4 - 6 Hrs
Water	Brush/Roller 60 - 70%		4 - 6 Hrs
Water	Brush/Roller 70 - 90%		4 - 6 Hrs
<b>SAND THE SURFACE WITH #180 TO GET A SMOOTH / UNIFORM SUBSTRATE</b>			
Water	Brush/Roller 35 - 45% Spray 50 - 60%	Brush/Roller 30 - 40 Spray 20 - 25	4 - 6 Hrs
Water	Brush/Roller 35 - 45% Spray 50 - 60%		4 - 6 Hrs

Note: Recoatability is measured at 25Deg C & 55- 60% RH



## ADDITIONAL INFORMATION

### POST PAINTING CARE

- » For best performance ensure dry dust cleaning at regular intervals.
- » Allow drying time of 3 weeks for proper film formation before any sponge cleaning with mild soap solution.

### PRIMER SELECTION GUIDE

- » For normal Walls that are cured and dry, Premium Cement Primer for Interior may be selected.
- » For old wall/repainting areas where hair line cracks are observed, after repairing the cracks as mentioned above, Salt resistant, elastomeric primer is recommended as two coats: first with ~70% dilution and a second primer coat at 30 – 40% dilution.
- » In areas where there is fine ground water seepage/capillary rise or efflorescence tendency, Wallmaax Prime seal is the preferred primer. This needs to be applied as two coats at 1 : 1 dilution in first coat and 40 – 50% dilution in the second.

### TECHNICAL DETAILS

- 1. Drying time:** Surface dry time 30 min
- 2. Sheen levels:** 8 - 14 at 60 deg GH  
a. Rich Matt 10 - 15 at 60° GH  
b. Regular 25 - 35 at 60° GH
- 3. Flash point IS101/1987 Part 1, Sec 6:** NA
- 4. Stability of thinned paint:** To be used within 24 hours
- 5. Shelf life:** 2 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.

### PRECAUTIONS

- » Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- » Do not over-thin or over-extend the brush.
- » Stir well and strain before use.
- » Tinted paints need thorough shaking immediately after tinter addition as well as before use.

### SAFETY FEATURES

- » Kindly refer to the MSDS for Wallmaax Paints Glaze Plus Interior Emulsion which gives detailed information on safety measures while handling the paint, which is available on request.
- » Store the container with the lid tightly closed in an upright position, in a cool, dry place
- » Keep out of reach of children and away from eatables.
- » May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- » Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- » In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- » Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- » Do not pour leftover paint down the drain or in water courses.
- » In the event of spills, contain spillage using sand or earth.
- » No added Lead, Mercury or Chromium compounds.

for online shop  
search

[www.shop.wallmaaxpaints.com](http://www.shop.wallmaaxpaints.com)



or scan  
here

