



WUDEX 1K PU WOOD CLEAR

WUDEX 1K PU WOOD CLEAR



LEAD FREE* GUARANTEE

* All Wall Maax Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2016.




PRODUCT DESCRIPTION

Wudex single pack PU Topcoat is polyurethane based clear topcoat designed to be used for all types of interior wood work. It provides a durable film that protects furniture from water, alcohol and other household chemicals. It is available in glossy & matt finish and is resistant to wear.

PRODUCT FEATURES

Available Packs

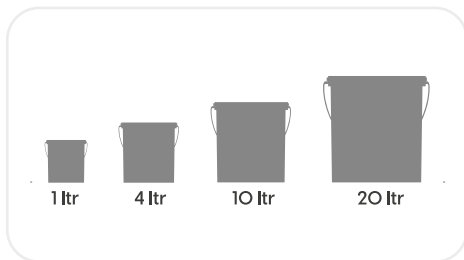

Available Colors

Transperant



Finish

▷ Matt ▷ Gloss

Coverage

On normal masonry surface after brushing



1 COAT
10 - 12 sq.m/l**

2 COAT
5 - 6 sq.m/l**

* Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

RECOMMENDED USES

Area



Interior



Exterior

Surfaces

It can be used on all types of interior wood like doors, windows, furniture, kitchen cabinets etc.

APPLICATION DETAILS & SURFACE PREPARATION

MIXING: Stir well before use

TOOLS: Brush, Spray

THINNING: Turpentine

THINNING RATIO: 10-15% by volume

SURFACE DRYING TIME: 30 minutes

FILLING: Wudex NC Sanding Sealer

APPLICATION ENVIRONMENT: Temperature: 10-40 Degree Humidity: Below 80%

CLEANING: Ensure that the wood is seasoned and the surface is well-dried. • To remove the oiliness inherent to tainin rich wood such as teak and rose wood, wipe clean with NC thinner.

SURFACE PREPARATION: Sand the wooden substrate along the grains, sequentially, with abrasive paper from grit numbers 80 to 180. • The dust, dirt that comes out during the sanding process should be totally removed. • Apply 2-3 coats of Sleek NC Sanding Sealer

APPLICATION: Apply 2 coats of Wudex PU Topcoat by brush or spray. Allow 6-8 hours drying time between coats.

SAFETY FEATURES: No added Lead, Mercury or Chromium compounds



ADDITIONAL INFORMATION

POST PAINTING CARE

For the best performance of the paint, ensure proper washing of the painting surface and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

TECHNICAL DETAILS

Coverage	: 60-70 Sq.feet/Liter/Coat
Drying Time	: 6-8 hours
Sheen level	: 90-95° - Glossy 10-15° - Matt
Flash point	: Above 34°C.
Stability of thinned paint	: NA
Appearance	: Clear
Solids	: 50+/-1%
Specific gravity	: 0.9
Recommended DFT	: 25 to 30 microns per coat
Pot life	: NA
Shelf life	: 12 Months
Contrast ratio	: NA

PRECAUTIONS

- » Flammable
- » Keep away from heat, sparks etc.
- » Use appropriate protection during application.
- » Ensure adequate ventilation during application.

*Practical Spreading Rate will vary from the quoted Theoretical Spreading Rate due to factors such as method and condition of application as well as surface roughness.

for online shop
search

www.shop.wallmaaxpaints.com



or scan
here

