



WUDEX 2K PU WOOD CLEAR

WUDEX 2K PU WOOD CLEAR & COLOURS



LEAD FREE* GUARANTEE



* All Wall Maax Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2016.


PRODUCT DESCRIPTION

Wudex 2 pack PU Topcoat is a reaction-cured system that is abrasion resistant and formulated to protect interior furniture & joinery from household chemicals and keep it looking new, with no harmful emission during curing.

- Quick drying
- Versatile & durable system
- Resistant to moisture
- Available in glossy, matt & silk-matt finishes

PRODUCT FEATURES

Available Packs

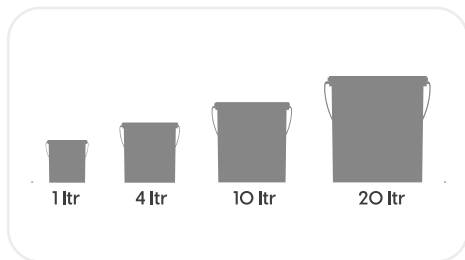

Available Colors

Transperant



Finish

- ▷ Matt
- ▷ Gloss
- ▷ Slik Matt

Coverage

On normal masonry surface after brushing



75 - 85 sq.ft/L

* Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

RECOMMENDED USES

Area



Interior



Exterior

Surfaces

It can be used on all types of interior wood like doors, windows, furniture, kitchen cabinets etc.

APPLICATION DETAILS & SURFACE PREPARATION

MIXING: Stir well before use

TOOLS: Brush, Spray

THINNING: PU Thinner

THINNING RATIO: **Brushing** - 15-20% by volume **Spraying** - 25-30% by volume

SURFACE DRYING TIME: 45 - 60 minutes at 30°C

FILLING: Wudex NC Sanding Sealer

APPLICATION ENVIRONMENT: Temperature: 10-40 Degree Humidity: Below 80%

CLEANING: Ensure that the wood is seasoned and the surface is well-dried. • To remove the oiliness inherent to tannin rich wood such as teak and rose wood, wipe clean with NC thinner.

SURFACE PREPARATION: Sand the wooden substrate along the grains, sequentially, with abrasive paper from grit numbers 80 to 180. The dust, dirt that comes out during the sanding process should be totally removed. • Apply 2-3 coats of Wudex Sanding Sealer depending on the filling required. Drying time between coats 34 hours & inter-coat sanding using abrasive paper grit number 320.

APPLICATION: Apply 2 coats of Wudex PU Topcoat by brush / spray with 3-4 hours drying time between coats. Intercoat sanding using abrasive paper grit number 400.

SAFETY FEATURES: No added Lead, Mercury or Chromium compounds



ADDITIONAL INFORMATION

POST PAINTING CARE

For the best performance of the paint, ensure proper washing of the painting surface and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

PRECAUTIONS

- » Flammable
- » Keep away from heat, sparks etc.
- » Use appropriate protection during application.
- » Ensure adequate ventilation during application.

TECHNICAL DETAILS

Coverage	: 75-85 Sq.feet/Liter/Coat
Drying Time	: 3-4 hours
Sheen level	: 90-95° - Glossy 10-15° - Matt
Flash point	: Above 23°C.
Stability of thinned paint	: 2 to 3 hours pot life
Appearance	: Clear
Solids	: 50+/-2%
Specific gravity	: NA
Recommended DFT	: 30 to 35 microns per coat
Pot life	: 2-3 hours after base & hardner are mixed at 30°C
Shelf life	: 12 Months
Contrast ratio	: NA

*Practical Spreading Rate will vary from the quoted Theoretical Spreading Rate due to factors such as method and condition of application as well as surface roughness.

for online shop
search

www.shop.wallmaaxpaints.com



or scan
here

